


2/2 way pilot operated solenoid valve with assisted lift, G 1/4" – G 1/2"


Common Features

Media: water, oil, air
 Media temperature: -10 to +130 °C
 Ambient temperature: -10 to +50 °C
 Body material: brass (CW617N EN 12165)
 Operator material: stainless steel
 Operator seal material: FKM
 Main seal and diaphragm material: FKM
 Protection class: IP 65 (with connector and gasket)

TYPE: D884/885/886



Dimensions & weights		D884	D885	D886
G connection	[ISO 228]	1/4"	3/8"	1/2"
A	[mm]	54	54	54
B	[mm]	89	89	89
C	[mm]	Hex 27	Hex 27	Hex 27
D	[mm]	15	15	15
weight	[kg]	0.45	0.4	0.4

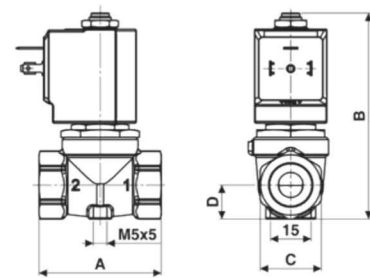

Flow direction overseat 1 → 2

General purpose

Valve code	Nominal Ø [mm]	Flow rate Kvs [l/min]	OPD			Coils	
			min. [barg]	max. AC [barg]	max. DC [barg]	code	[Volts/Hz]
D884DVU	10.5	21	0	16	6	7250	24 VDC
D885DVU	10.5	24	0	16	6	7200	24 V 50/60 Hz
D886DVU	10.5	25	0	16	6	7400	110 V 50 Hz - 120 V 60 Hz
						7600	200 V 50 Hz - 220 V 60 Hz
						7700	230 V 50 Hz - 240 V 60 Hz

D884/885/886 - FKM seal, NC -

Coil power: AC 18 VA (holding)
 AC 36 VA (inrush)
 DC 14 W