Quick swivel joint G 1/4"(male thread)-G 1/4"(Female thread)

Item number: GFS 1/4



Example illustration

Item description

Suitable:

As a rotating compressed air supply in mechanical engineering

Materials:

Body: Nickel-plated brass, pivot pins: zinc plated steel, ball bearing: steel, seal: NBR

Temperature range:

0°C to +60°C

Operating pressure:

-0,95 to 10 bar

Media:

Compressed air, neutral gases

Properties


| Thread external | G 1/4" |
|-----------------|--------|
| Thread internal | G 1/4" |
| Umax.* [1/min] | 1200 |

Further information:

| Weight | 65 g / pcs |
|---------------------|---------------|
| GTIN | 4050571324902 |
| Customs duty number | 84812090 |

| RoHS compliant | Yes |
|----------------|--------|
| Manufacturer | Sang-A |

Drawing:

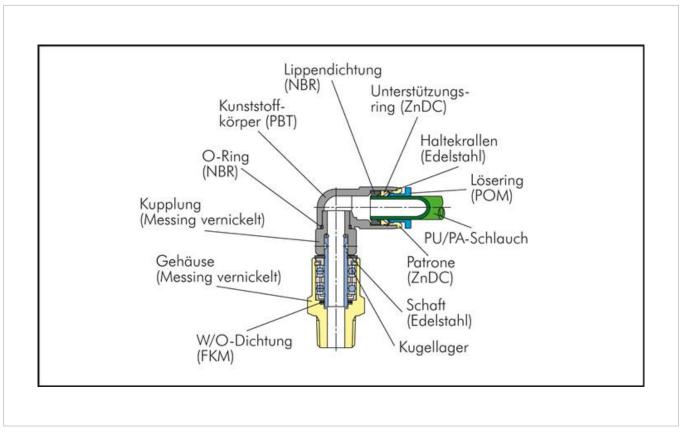

Drawing: Structure of quick swivel joint