







## MULTI-STAGE VACUUM GENERATORS SERIES M

These new design vacuum generators feature multiple state of the art ejectors assembled onto small modules. One of their distinctive features is their great suction flow rate compared to their reduced size.

With a compressed air supply of 4 - 5 bar, they can produce a maximum vacuum equal to 85% and a suction flow rate of 3.6 - 18 m<sup>3</sup>/h, according to the number of modules.

The silencer is built-in.

They are fully made with slightly anodised alloys and can be installed in any position. The multi-stage vacuum generators in this range are suited for interconnecting vacuum cup gripping systems and, in particular, in the industrial robotics sector, which requires equipment with excellent working performance, but with weight and size reduced to the minimum.

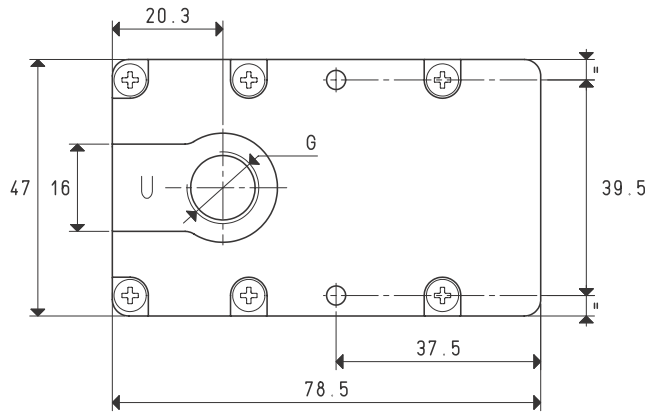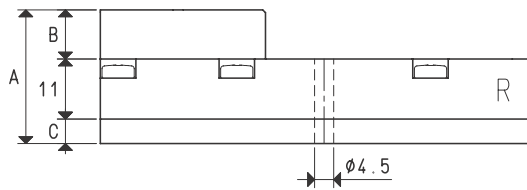

P=COMPRESSED AIR CONNECTION      R=EXHAUST      U=VACUUM CONNECTION

Item		M 3			M 7		
Intake air flow rate	m <sup>3</sup> /h	3	3.4	3.6	5.4	5.8	6.2
Maximum level of vacuum	-KPa	62	82	85	62	82	85
Final pressure	mbar abs.	380	180	150	380	180	150
Supply pressure	bar	3	4	5	3	4	5
Optimal supply pressure	bar			5			5
Air consumption	NI/s	0.5	0.7	0.8	0.8	1.2	1.4
Operating temperature	°C			-10 / +80			-10 / +80
Noise level at optimal supply pressure	dB(A)			64			70
Weight	g			109			111
A				24.5			25.5
B				9			10
C				4.5			4.5
E	∅			20			24
F				11			12
G	∅			G1/4"			G3/8"
Spare parts		M 3			M 7		
Sealing kit and reed valves	item	00 KIT M 3			00 KIT M 7		
Exhaust silencer	item	00 15 150			00 15 150		

Note: All vacuum values indicated in the table are valid at the normal atmospheric pressure of 1013 mbar and obtained with a constant supply pressure.

Vacuum generator supply must be carried out with non-lubricated compressed air, 5 micron filtration, in accordance with standard ISO 8573-1 class 4.



Transformation ratio: N (newton) = Kg x 9.81 (force of gravity)

inch =  $\frac{\text{mm}}{25.4}$  ; pounds =  $\frac{\text{g}}{453.6} = \frac{\text{Kg}}{0.4536}$

Adapters for GAS - NPT threading available on page 1.130





Air flow rate (NI/s) at different level of vacuum (-KPa) at optimal supply pressure

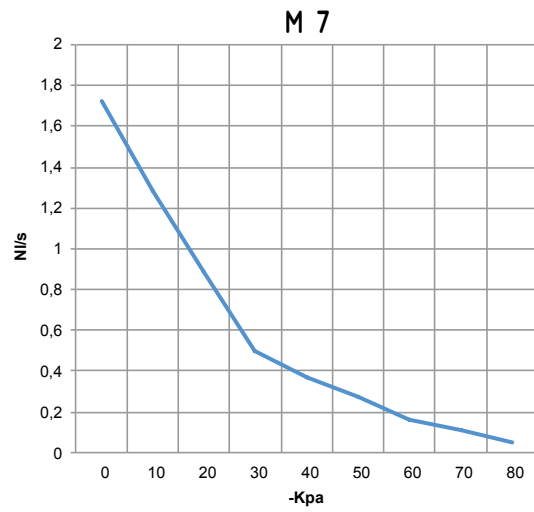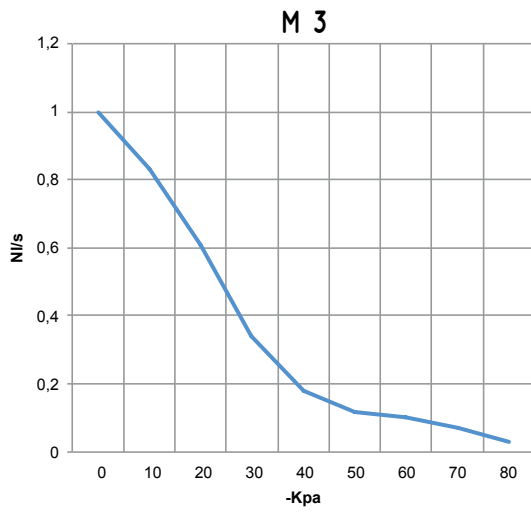

Generator item	Supp. press. bar	Air consumption NI/s	Air flow rate (NI/s) at different levels of vacuums (-KPa) at optimal supply pressure										Max vacuum -KPa
			0	10	20	30	40	50	60	70	80		
M 3	5.0	0.8	1.00	0.83	0.61	0.34	0.18	0.12	0.10	0.07	0.03	85	
M 7	5.0	1.4	1.72	1.28	0.89	0.50	0.37	0.27	0.16	0.11	0.05	85	

Evacuation rates (ms/l = s/m³) at different levels of vacuums (-KPa) at optimal supply pressure

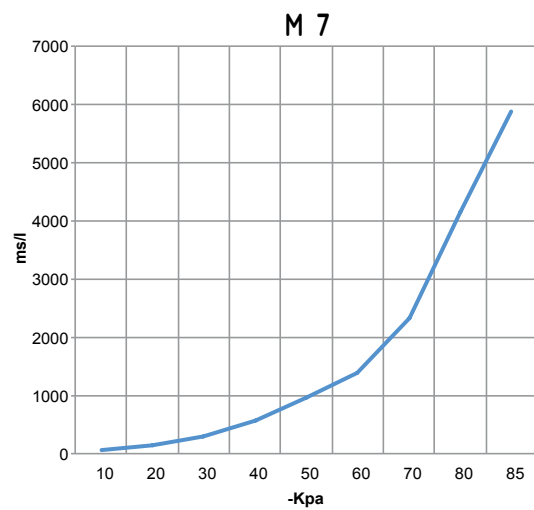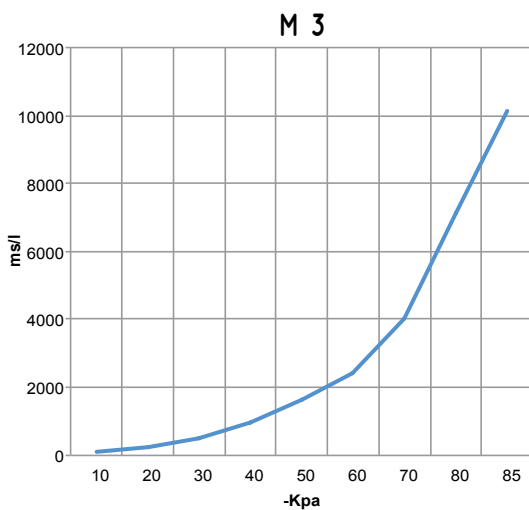

Generator item	Supp. press. bar	Air consumption NI/s	Evacuation rates (ms/l = s/m³) at different levels of vacuums (-KPa) at optimal supply pressure										Max vacuum -KPa
			10	20	30	40	50	60	70	80	85		
M 3	5.0	0.8	106	244	491	969	1642	2398	4004	7128	10122	85	
M 7	5.0	1.4	61	142	285	563	954	1394	2328	4144	5885	85	